

PRESENTATION REMOTE

RF-100

SETUP

1. Install Battery

Insert the included AA alkaline battery into the remote's battery compartment.

2. Connect USB Receiver

Plug the receiver into a USB port on your computer.

Tip: Do not place receiver on or in a metal cabinet or near strong EMI sources.

3. Set Address

Press and release the button on the underside of the receiver. While the LED on the receiver blinks, simultaneously press and release the ◀ and ▶ buttons on the remote. This sets the remote and receiver to one of 65,000 random addresses.

4. (Optional) Set More Devices to Control This Computer

Press and release the button on the underside of the receiver and then press the address setting button(s) on each device (refer to each device's instructions for specifics). You have 30 seconds to address each device. Once a device gets the address, the receiver waits another 30 seconds for additional devices.


OPERATION

Use the ▶ and ◀ buttons to go forward and back in PowerPoint slideshows. The **BlackScreen** (b) button uses a special PowerPoint feature to blank the screen.

The RF-100 is designed to transmit reliably at distances of 100 feet (31 meters) or more. Pressing a button makes the green **sending** LED on the RF-100 flash and the receiver LED blink green.

Note: Operating range will vary depending on positioning of the receiver, remote, nearby sources of interference and other factors.

Note: To protect the battery from accidental discharge, the remote will stop transmitting if a button remains pressed for more than 60 seconds.

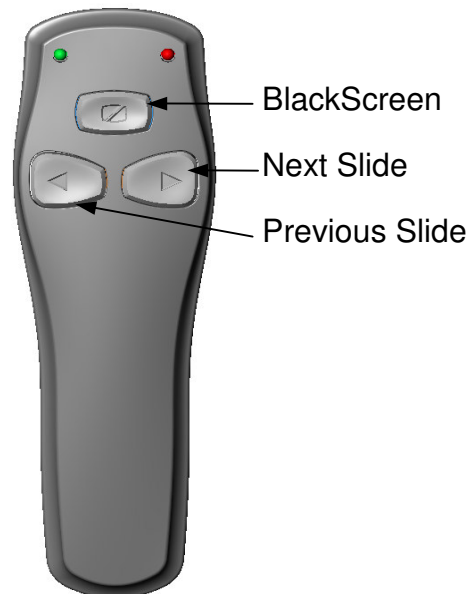

WIRELESS[™]
COMPUTING

www.wireless-computing.com

TROUBLESHOOTING

The receiver LED is not lit

- Ensure that the computer is powered on and the receiver is connected to computer's USB port.

Button presses don't get to the computer

- If neither LED on the remote flashes when you press a button, replace the battery.
- If the red **no signal** LED flashes when you press a button, reposition the receiver and ensure the remote and receiver are no more than 100 feet apart. If the problem persists, set the address.
- If the green **sending** LED flashes when you press a button, but the computer does not respond, be sure you are running a program compatible with the RF-100 key codes. You can use a PowerPoint slideshow or web browser for testing. If the problem persists, unplug the receiver and plug it back into the computer.

Note: For a list of compatible programs, see the RF-100 support section on our web site.

- Unplug the receiver and plug it back into the computer.

The RF-100 works, but other Wireless Computing devices don't

- The other devices aren't set to the receiver's address. Set the address on all devices.

The cursor moves by itself or keystrokes appear from nowhere

- Your receiver is within range another Wireless Computing device set to the same address. Set the address.

FOR FURTHER ASSISTANCE

Visit www.wireless-computing.com/support or call customer support at 512.858.4400 between 8:30-5:30 Central Time.

FCC Information

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Consult the dealer or a Wireless Computing technician for help.

The radio module has been evaluated under FCC bulletin OET 65C and found compliant to the requirements as set forth in CFR 47 sections 2.1049, 15.203, 15.209 and 15.249 addressing RF exposure from radio frequency devices.

Tested to comply with FCC standards.

FCC ID: L7MR150 RF-100 Presentation Remote
L7MR019 RF-019 Dual Antenna Receiver

ADDITIONAL INFORMATION

For use with UL Listed, CSA approved personal computers. Not intended for use in machinery, medical or industrial applications. Do not use in aircraft or hazardous locations.

Caution: Any changes or modifications not expressly approved by Wireless Computing could void your authority to operate this device. No parts are user serviceable.