

# PRESENTATION REMOTE

## RF-100

### INSTRUCTIONS

1. **Install Battery.** Insert one AA alkaline battery (included) in remote's battery compartment.
2. **Connect Receiver.** Plug the receiver into your computer's USB port. If you see a series of dialog boxes about USB drivers, press Enter repeatedly to accept the standard USB drivers in Windows.

Tip: Do not place receiver in an equipment cabinet or near other strong EMI sources.

3. **Set Address.** Press and release the momentary switch on the underside of the receiver. While the green LED on the receiver blinks, on the remote, press the ◀ and ▶ buttons simultaneously. This matches the remote's address to the receiver's.

### OPERATION

Use the ▶ (**PgDn**) and ◀ (**PgUp**) buttons to go forward and back in PowerPoint slideshows. The **BlackScreen** (b) button uses a special PowerPoint feature to blank the screen.

The RF-100 is designed to transmit reliably at distances of 100 feet (31 meters) or more. Pressing a button blinks the green LEDs on both the remote and


receiver. Operating range will vary depending on positioning of the receiver and remote, nearby sources of interference, and other factors.

To protect the battery from accidental discharge, the remote stops transmitting if a button remains pressed for more than 60 seconds.

### TO USE MORE THAN ONE REMOTE OR KEYBOARD ON A COMPUTER

If desired, you can set multiple RF-100 Presentation Remotes and RF-250 Wireless Keyboards to operate the same computer.

1. Connect one receiver to the computer.
2. Press and release the momentary switch on the underside of the receiver.
3. While the green LED on top of the receiver blinks, on each RF-100, simultaneously press the ◀ and ▶ buttons to set their addresses. Next, press the **Addr** key on each RF-250 to set its address. After a remote or keyboard retrieves the receiver's address, the receiver's LED continues blinking for another 30 seconds.

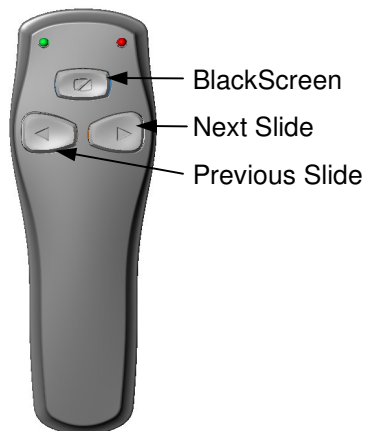

## TROUBLESHOOTING

### Green LED on receiver is not lit

- Ensure computer is powered on and receiver is connected to computer's USB port.
- Unplug receiver and plug it into the computer's USB port again.

### Button presses don't get through

- If neither LED on the remote flashes when you press a button, replace the battery.
- If the red LED flashes when you press a button, reposition the receiver and ensure the remote and receiver are no more than 100 feet apart. If the problem persists, reset the address.
- If the green LED flashes when you press a button, and yet the computer does not respond, be sure you are running a program that responds to the **PgUp**, **PgDn** and "**b**" keys. For example, use a PowerPoint slideshow for testing. If the problem persists, unplug the receiver and plug it into the computer's USB port again.

### Cursor moves by itself, or keystrokes appear "from nowhere"

- The address of your receiver may be the same as the address of another RF-100 Presentation Remote or RF-250 Wireless Keyboard within range. Reset your receiver's address.

## FOR FURTHER ASSISTANCE

Please visit our online customer support page:

[www.wireless-computing.com/support](http://www.wireless-computing.com/support)

Or call customer support at **512.858.4400** between 8:30-5:30 Central Time.

## FCC Information

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Consult the dealer or a Wireless Computing technician for help.

The radio module has been evaluated under FCC bulletin OET 65C and found compliant to the requirements as set forth in CFR 47 sections 2.1049, 15.203, 15.209 and 15.249 addressing RF exposure from radio frequency devices.

Tested to comply with FCC standards.

FCC ID: L7MR150 RF-100 Presentation Remote  
L7MR015 RF-01x Wireless Receiver

## ADDITIONAL INFORMATION

For use with UL Listed, CSA approved personal computers. Not intended for use in machinery, medical or industrial applications. Do not use in aircraft or hazardous locations.

**Caution:** Any changes or modifications not expressly approved by Wireless Computing could void your authority to operate this device. No parts are user serviceable.